


## PT - 35X25

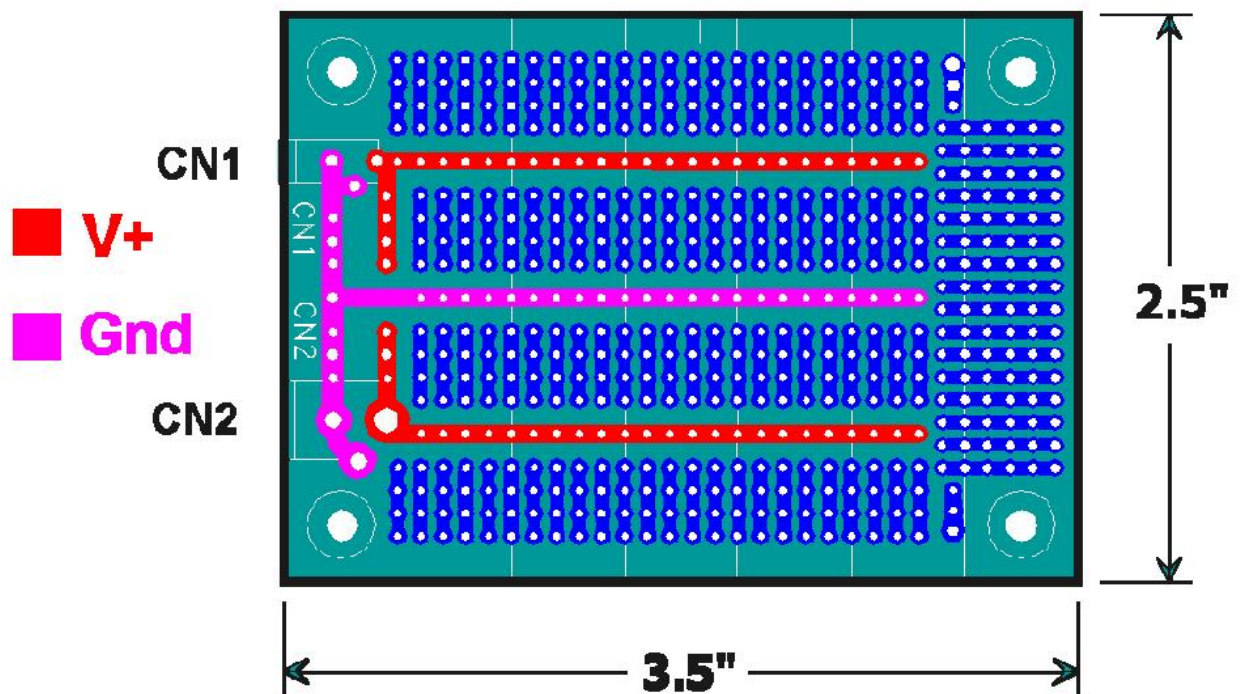

The board material is FR4, 1/16" thick. Except for a short 0.3" trace which completes the V+ trace on the bottom of the board, the trace patterns are identical on the top and bottom of the board. To help you locate positions on the board, the silk screen has vertical lines every 0.5", as well as connector outlines for CN1 and CN2. (The silk screen is identical on the top and bottom of the board.) There are four board mounting holes, 0.140" diameter; 456 IC/component circuit mounting holes, 0.036" diameter; 99 front panel/terminal strip mounting holes, 0.045" diameter; and 18 other holes of miscellaneous sizes. Recommend Jameco Part Numbers [101179](#) & [101187](#) (for Power Jacks).